


Circuit Diagram

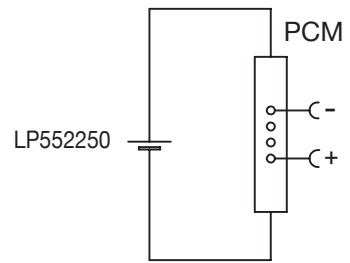

Specification

Lithium Polymer Battery Pack LP552250 600mAh 3.7V with Protection Circuit Module (PCM)
 This data sheet describes the requirements and properties of lithium polymer rechargeable battery pack manufactured by LiPol Battery Co., Ltd - China

Mechanical Characteristics

- Cell ▶ LP552250
- PCM ▶ Yes
- NTC ▶ No
- Configuration ▶ 1S1P
- Weight ▶ appr. 12g

Electrical Specification

- Rated Capacity ▶ 600mAh min, 620mAh typ.
- Nominal Voltage ▶ 3.7V
- Wat-Hour Rating ▶ 2.22Wh
- Max. Operating Voltage Range ▶ 2.75V to 4.20V
- Max. Charge Voltage ▶ 4.2V ±50mV
- Max. Charge Current ▶ 300mA
- Max. Continuous Discharge Current ▶ 600mA
- Discharge Cut Off ▶ 2.75V
- Internal Impedance ▶ <200mΩ
- Expected Cycle Life @ (0.5C/0.5C) @ 23±5°C ▶ 500 cycles ≥ 80%

Cell Protection

- Overcharge Detection ▶ 4.275V ±50mV (0.7 to 1.3msec. delay, release 4.275V ±50mV)
- Overdischarge Detection ▶ 2.75V ±50mV (14 to 26msec. delay, resume 2.50V ±50mV)
- Overcurrent Detection ▶ 2A to 2.5A (8 to 16msec. delay)

Ambient Conditions

- Charge Temp. Range ▶ 0 to +45°C
 - Discharge Temp. Range ▶ -20 to +60°C
 - Storage Temp. Range ▶ 1 year at -20 to +30°C >70%
 - ▶ 3 months at -20 to +45°C >70%
 - ▶ 1 month at -20 to +60°C >70%
 - ▶ 65 ±20%RH
- Humidity

Environmental and Safety

Please follow LiPol Handling and Safety Precautions for Lithium Polymer Battery. This battery meets the requirements of Battery Directives, and the battery parts are IEC 62133 & RoHS-Compliant. For more safety precautions and performance standards, please go to www.lipolbattery.com/support.html

Mae in mm	Freimatoleranzen	Date	Name	LiPol Battery	Index	
All dimensions in mm	Generaltolerances	Erst. / Orig	10.09.2019			Xie Qingfang
Als Betriebsgeheimnis anvertraut, alle Rechte vorbehalten	up to 6 · 0,1	Gepr./check	10.09.2019	Guo Daxia		
	over 6 up to 30 · 0,2	Benennung/ Designation		3	Zchgng. / Dwg. Nr.	
Proprietary data, company confidential, all rights reserved.	over 30 up to 100 · 0,3	LP552250				FD_3050_73
	over 100 · 0,5	Origin:				
			support@lipolbattery.com		www.LiPolBattery.com	